




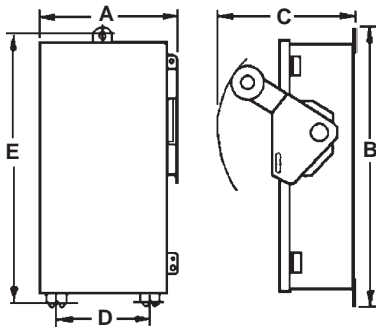


STANDARD FEATURES:

-  **NEMA 12 Enclosure**
-  **3 Pole, 600 Volt AC**
-  **UL Listed**
-  **Single Throw**
-  **Heavy Duty**

DIMENSIONS

in inches



2723 Fusible Disconnect Switch*

Amp Rating	Wide A	High B	Deep C	D	E	Approx. wt, lb
30	8 ⁷ / ₈	17 ⁷ / ₈	10 ¹ / ₄	5 ¹ / ₂	17	20
60	8 ⁷ / ₈	17 ⁷ / ₈	10 ¹ / ₄	5 ¹ / ₂	17	14
100	11 ⁷ / ₈	24	10 ¹ / ₄	8 ¹ / ₂	23 ¹ / ₈	29
200	16 ³ / ₄	34 ³ / ₈	11 ⁵ / ₄	12 ¹ / ₂	33	55
400	25	63	14 ³ / ₄	19	61 ³ / ₄	102

* Furnished with fuse clips located for Class H fuses. Conversion to type J fuse spacing requires relocating the load side fuse base assembly to an alternate position as marked in the enclosure.



The 2723 series are heavy duty visible blades switches designed for application where maximum performance and continuity of service are required. All switches feature quick-make, quick-break operating mechanism, and high visibility indication of switch position.

ORDERING DESCRIPTION

2723 - _____
 |
 | Specify Amp Rating
 |
 | 30
 | 60
 | 100
 | 200
 | 400
 | XX = Other

NOTES:

1. Fuses are not supplied with the unit. North American recommends that the installing contractor specify and install the fuses.
2. North American Mfg. has standardized the selection of the 2723 Fusible Disconnect Switches with Cutler Hammer being our preferred source.

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM FIVES NORTH AMERICAN COMBUSTION, INC. IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

WARNING: Situations dangerous to personnel and property may exist with the operation and maintenance of an combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Parts of this product may exceed 160F in operation and present a contact hazard. Fives North American urges compliance with National Safety Standards and insurance Underwriters recommendations, and care in operation.

Fives North American Combustion, Inc., 4455 East 71st Street, Cleveland, OH 44105 USA, Phone 216.271.6000
 Fax 216.641.7852 email: fna.sales@fivesgroup.com • www.fivesgroup.com/fivesna