


H5530C SimPlex™ MOTORIZED ACTUATOR Designation Guide

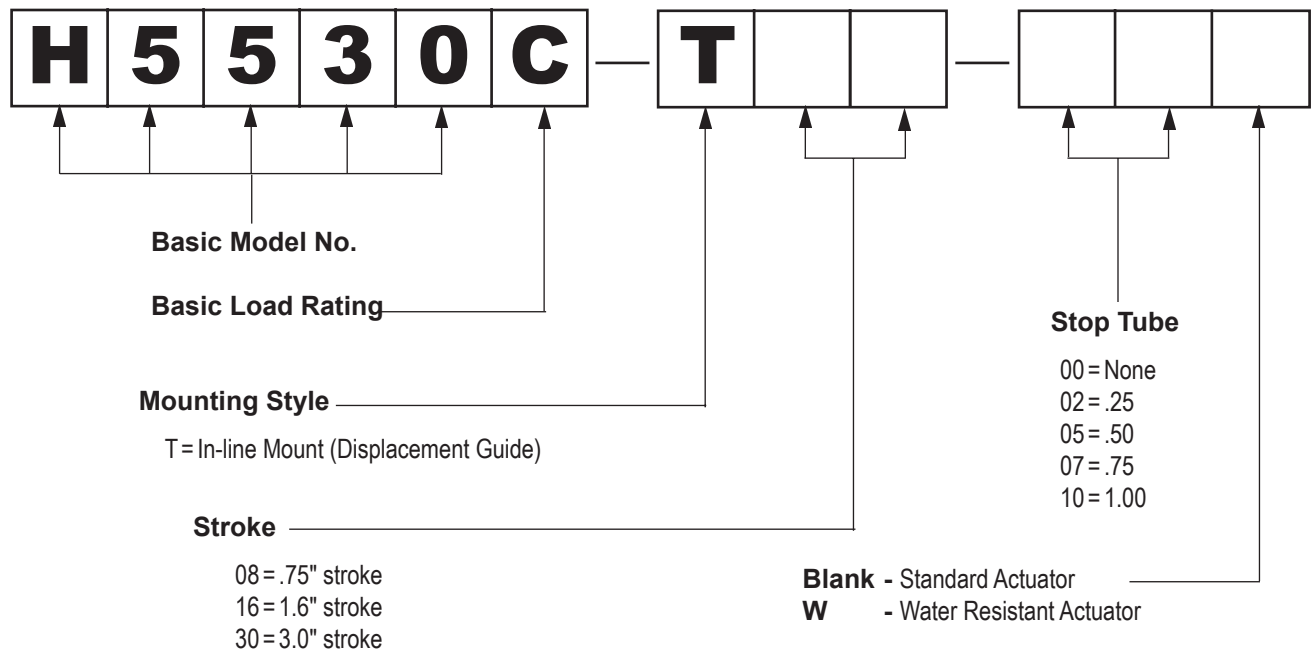

Notes:

1. Cable ordered separately. Specify H6415-5530C-07A for a 7' cable or H6415-5530C-15A for a 15' cable.
2. Some coding designations do not make sense and will not be used; such as a .75" stroke actuator with a .75" or 1.00" stop tube.
3. When a stop tube is used, it will limit the thrust rod travel on the outward (max.) stroke. (Refer to Bulletin 10051/9.00)
4. Contact Fives North American with your water resistant application.

Fives North American Combustion, Inc., 4455 East 71st Street, Cleveland, OH 44105 USA, Phone 216.271.6000
Fax 216.641.7852 email: fna.guiding@fivesgroup.com • www.fivesgroup.com/fivesna